


Catalogue No: V7-H6

SCREW TERMINAL FUSE 4mm NO INDICATION

Termination and Wiring Systems > Terminals and Pre-Wired Cables > Terminals - Screw > Sprecher + Schuh Screw Type Terminals V7-W > Isolating Terminals > Fuse and plug disconnect terminal blocks 4 mm²



Screw terminal for 6.3x32mm fuse and 4mm² conductor. No Indication.

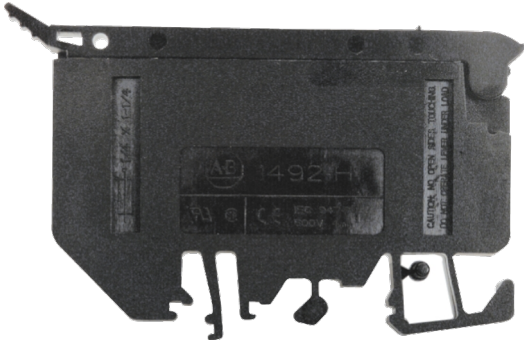

- Designed for ease of wiring, secure connections and durability
- Comprehensive range, offering a wide array of terminal types for most circuits and functions
- Terminals accommodate a full range of wire sizes from 0.5 to 70mm² wire cross section
- Cone shaped guide allows easy wire insertion
- Specialty terminals including two-level, grounding, diode, isolating, fuse, sensor and thermocouple terminals
- International approvals, UL recognized, IEC and CSA certified.

Representative Photo Only
(actual product may vary based on configuration selections)

SPECIFICATIONS

Product Series	V7
Component Type Termination Wiring	Terminal
Number of Levels	1
Package Quantity	50 qty
Colour, Body / Housing	Black colour
Wire / Conductor Size (Min)	0.05 mm ² min
Wire / Conductor Size (Max)	4 mm ²
Wire Strip Length	9.7 mm
Tightening Torque, Nominal	0.8 Nm
In, Rated Current	12 A
Un, Nominal Voltage	500 V
Fuse Supplied	No Y/N
Fuse Cartridge Size	6.3 x 31.8mm size
Height	81.3 mm
Width	9.1 mm
Depth	47 mm
Insulation Temperature (Min)	-40 °C
Insulation Temperature (Max)	90 °C
Standards Compliance	IEC 60947-1 IEC 60947-7-1 IEC 60947-7-2 CSA C22.2 No.158 UL 1059 UL 457 UL 486E
Certifications	CSA UR

Catalogue No: **V7-H6**

SCREW TERMINAL FUSE 4mm NO INDICATION

Termination and Wiring Systems > Terminals and Pre-Wired Cables > Terminals - Screw > Sprecher + Schuh Screw Type Terminals V7-W > Isolating Terminals > Fuse and plug disconnect terminal blocks 4 mm²



REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	V7H6_Manufacturer_Catalogue

