

Eaton molded case circuit breaker accessory trip unit

KES3250LSI

UPC:786679271155

Dimensions:

- **Height:** 5.5 IN
- **Length:** 6.8 IN
- **Width:** 4.3 IN

Weight:2.8 LB

Warranties:


- Eaton Selling Policy 25-000, one (1) year from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.

Specifications:

- **Type:** KES 310+ electronic
- **Amperage Rating:** 250A
- **Number Of Poles:** Three-pole
- **Trip Type:** LSI
- **Frame Size:** K-frame
- **Series:** Series C

Supporting documents:

- [UL listed 100%-rated molded case circuit breakers](#)
- [Application of Tap Rules to Molded Case Breaker Terminals](#)
- [Application of Multi-Wire Terminals for Molded Case Circuit Breakers](#)
- [Circuit breaker motor operators product aid](#)
- [Motor protection circuit breakers product aid](#)
- [Power metering and monitoring with Modbus RTU product aid](#)
- [Plug-in adapters for molded case circuit breakers product aid](#)
- [310+ MCCB product family pocket folder](#)

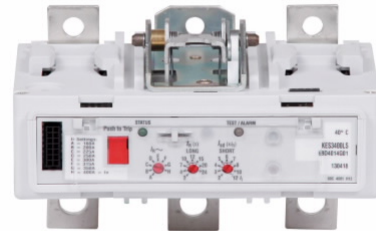

- [Current limiting Series C molded case circuit breakers product aid](#)
- [Multi-wire lugs product aid](#)
- [StrandAble terminals product aid](#)
- [Eatons Volume 4-Circuit Protection](#)
- [Molded case circuit breakers](#)
- [Instruction Leaflet for the KT 310+ Electronic Trip Unit](#)
- [Instruction Leaflet for the KES 310+ Electronic Trip Unit](#)
- [Installation Instructions for DK, KDB, KD, HKD, KDC, KW, HKW, KWC, CKD, CHKD Circuit Breakers and Molded Case Switches](#)
- [Breaker service centers](#)
- [K-Frame 310+ Molded-case circuit breakers](#)
- [Eaton Specification Sheet - KES3250LSI](#)
- [MOEM MCCB product selection guide](#)
- [Series C J-Frame molded case circuit breakers time current curves](#)
- [Series C F-Frame molded case circuit breakers](#)
- [Series C G-Frame molded case circuit breakers time current curves](#)

Certifications:

- [UL Listed](#)

Product compliance:

- [Contact Manufacturer](#)