


# 194EY80M17536N

Allen-Bradley 194E Enclosed Disconnect Switch IP 65 Plastic,  
Type N Actuator Red/Yellow, 3 Pole 80A



**Allen-Bradley**  
by ROCKWELL AUTOMATION

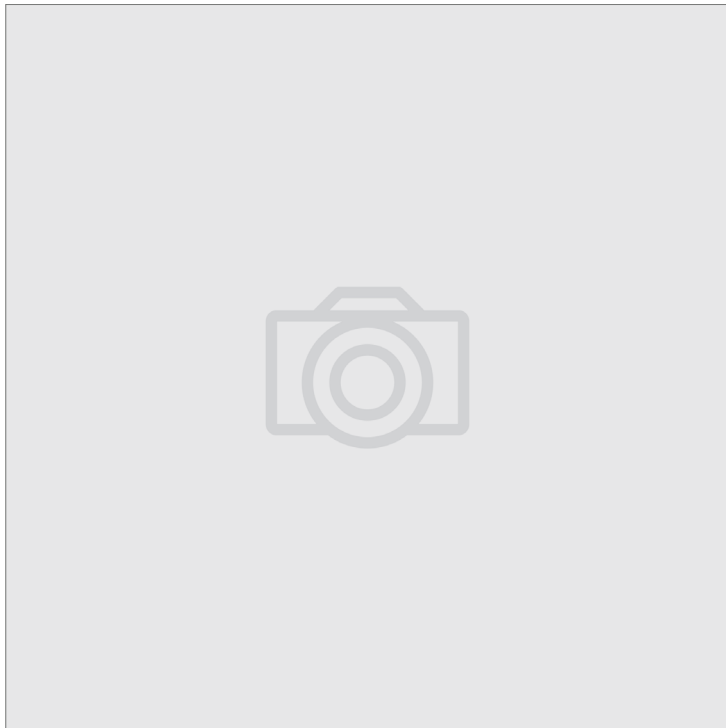

<b>Component type</b>	Switch disconnector
<b>Range</b>	194E
<b>Model</b>	N/A
<b>Product status</b>	Existing

Bulletin 194E Load Break Switches provide a safe and reliable way to disconnect and isolate power from machinery. Featuring visible on/off indication, padlockable handles, a blade stop, easy maintenance and switch longevity. Available from 16A to 100A and in 3 Pole to 6 Pole configurations. Options include additional poles, grounding and neutral terminals and auxiliary contacts.

## ELECTRICAL

Max. rated operation voltage $U_e$ AC	690.0 V
Rated permanent current $I_u$	80.0 A
Number of poles	3.0
Rated operation power at AC-3, 400 V	30.0 kW
Rated operation power at AC-23, 400 V	37.0 kW
Rated short-time withstand current $I_{cw}$	2500.0 kA
Type of control element	Long turning handle
Type of electrical connection of main circuit	Screw connection
Conditioned rated short-circuit current $I_q$	30.0 kA
Number of auxiliary contacts as normally closed contact	0.0
Number of auxiliary contacts as normally open contact	0.0
Motor drive integrated	No
Voltage release optional	No

## CONSTRUCTION

Device construction	Complete device in housing
Material housing	Plastic
Colour control element	Red
Degree of protection (IP), front side	IP20
Version as main switch	Yes
Version as maintenance-/service switch	Yes
Version as emergency stop installation	No
Version as reversing switch	No
Number of switches	1.0
Suitable for distribution board installation	No
Interlockable	Yes
Degree of protection (NEMA)	4X

# 194EY80M17536N

Allen-Bradley 194E Enclosed Disconnect Switch IP 65 Plastic,  
Type N Actuator Red/Yellow, 3 Pole 80A



**Allen-Bradley**  
by ROCKWELL AUTOMATION

## DIMENSIONS

Width	175.0 mm
Depth	120.0 mm
Height	230.0 mm